

i tape



AMERICAN[®]
brand



MP

MEDIUM GRADE AUTOMOTIVE REFINISHING TAPE

Capable of withstanding oven temperatures up to 250°F (120°C) for one hour, MP is also UV resistant for up to 3 days with clean removal. Moisture and stain resistant, its specially designed adhesive sticks firmly and securely to most surfaces and removes cleanly. Perfect for body shop spray paint applications, it can also be used on boats, wooden window manufacturing, some PCB manufacturing and any critical masking application requiring higher temperature resistance versus most general purpose masking tapes.



FEATURES & BENEFITS

- Superior wet sandability
- Robust backing gives higher tensile strength and better cornering
- 3 day UV resistance
- New release coat chemistry that provides for better shingling
- No paint flaking upon demask



©2018 Intertape Polymer Group • MP SS • 081018



888-898-7834 | itape.com

ipg[®] intertape
polymer
group[®]

PRODUCT ATTRIBUTES

PRODUCT STYLE	BACKING	ADHESIVE	TOTAL THICKNESS	TENSILE STRENGTH	ADHESION TO STEEL	ELONGATION	TEMPERATURE RESISTANCE
			mils	lb/in of width	oz/in of width	% at break	
MP	Crepe paper	Natural rubber	6.1	25	33	8	250°F (120°C) 1 hour


RESOURCE NUMBER	SIZE	ROLLS PER CASE
MP1855	18mm x 54.8m	48 rolls
MP2455	24mm x 54.8m	36 rolls
MP3655	36mm x 54.8m	24 rolls
MP4855	48mm x 54.8m	24 rolls

PRODUCT APPLICATIONS

- Paint masking
- Wooden window manufacturing
- PCB manufacturing
- Spray paint masking

MARKETS

- Automotive
- Marine and Composites
- Transportation
- Painting
- Aerospace

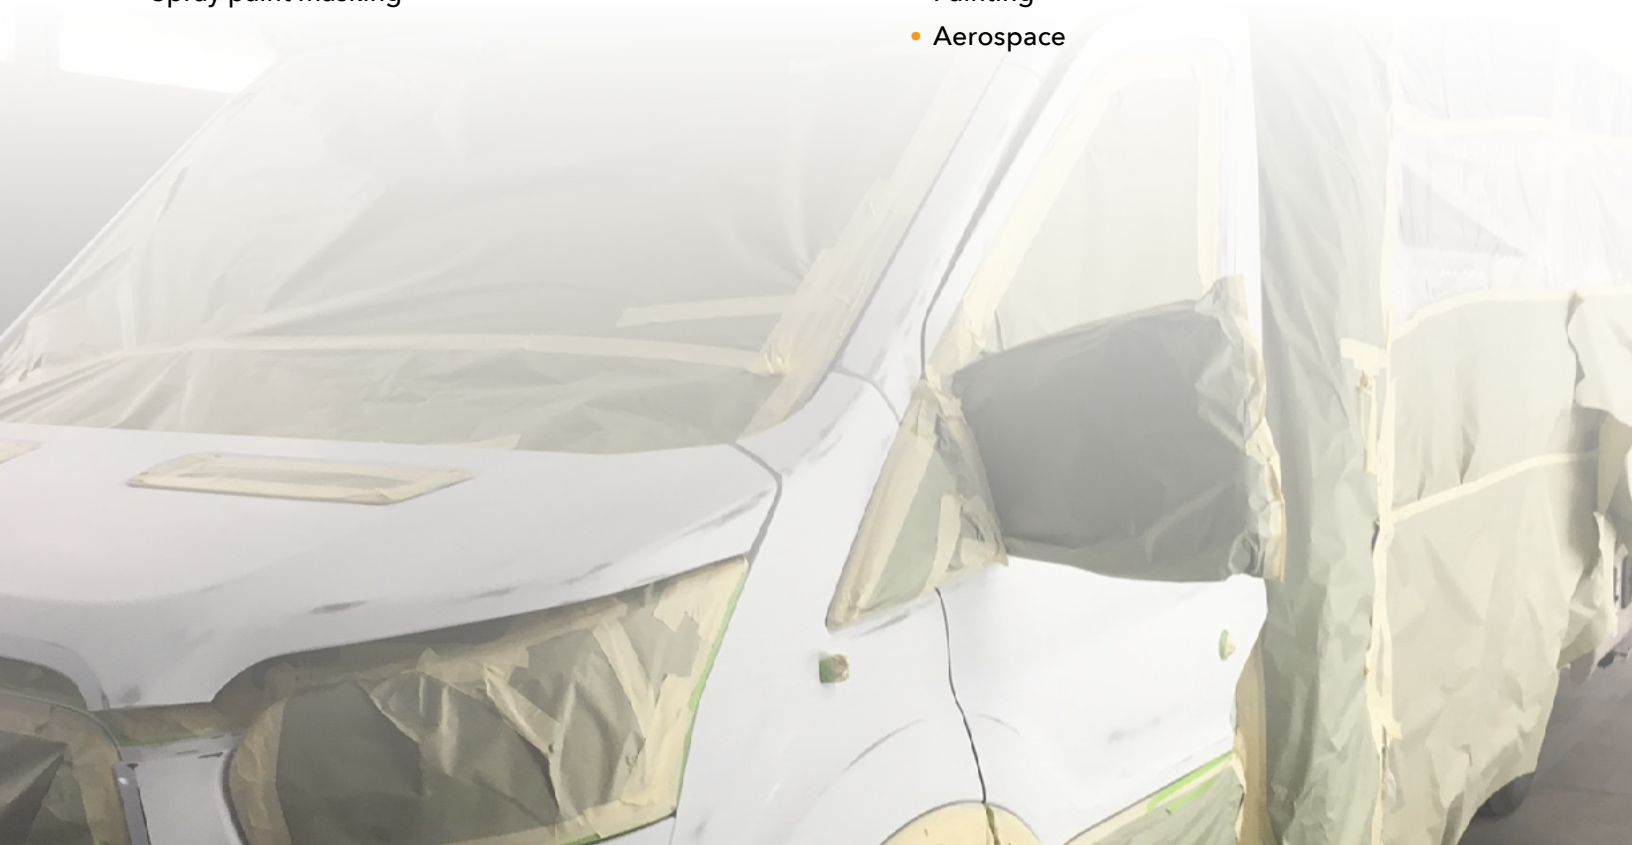

Scan for more info or visit itape.com/masking

