

i tape



ATG160, 200 & 500

REVERSE WOUND ACRYLIC TRANSFER ADHESIVE TAPES

ATG tape is a reverse wound transfer adhesive, wound onto a 1" core that is placed into an ATG (Adhesive Transfer Gun) dispenser. The hand-held dispenser applies the transfer adhesive to the receiving material and automatically winds up the liner, which is removed from the adhesive during the application. ATG tapes are available in a variety of widths and adhesive thicknesses.

FEATURES & BENEFITS

ATG LR Dispenser

- Trigger operated
- Rewind roller to collect used liner
- Natural rubber roller for smooth application
- Gear driven mechanism for positive and reliable usage
- Accepts 1" ID cores

All tapes are Photo Safe

ATG160


- Used for light duty industrial and consumer applications

ATG200

- Provides good adhesion to paper, most plastics and metal foils

ATG500

- Delivers quick and aggressive tack as well as good shear and hold power
- Bonds well to many irregular surfaces

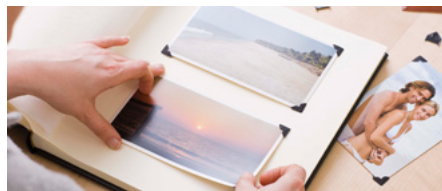

©2018 Intertape Polymer Group • ATG 160, 200, & 500 SS • 06/15/18



800-565-2000 | itape.com



PRODUCT ATTRIBUTES

| Style | Size | | Adhesion to Steel (oz/in) | Thickness w/o Liner | Service Temperature | Color |
|------------------|---|------------|------------------------------|------------------------|--|----------------------------------|
| | Width (mm) | Length (m) | | | | |
| ATG160 | 6, 12, 19 | 33, 55 | 40 (10.9 N/25mm) | 1.6 mil (0.04mm) | 250°F (121°C) Short Term 140°F (60°C) Long Term | Clear with printed gold liner |
| ATG200 | 6, 12, 19 | 33, 55 | 55 (15 N/25mm) | 2.0 mil (0.5mm) | -22°F to 356°F -30°F to 180°C | Clear with printed gold liner |
| ATG500 | 6, 12, 19 | 16.5, 33 | 73 (20 N/25mm) | 4.8 mil (1.22mm) | -22°F to 230°F -30°F to 110°C | Clear with brown paper liner |
| ATG LR Dispenser | Description: Long Roll ATG Tape Dispenser | | | | | Blue |

PRODUCT APPLICATIONS

ATG160

- Light duty signage
- Picture framing
- Crafting
- Scrapbooking
- Bonding nameplate

ATG200

- Splicing
- Picture framing
- Photo and Poster mounting
- Graphic arts
- Core startup
- Product assembly

ATG500

- Pocket folder assembly
- Heavier duty splicing
- Product assembly
- Bonding foams, boxes, fabrics
- Applications requiring gap filling

MARKETS


- POP
- Crafting/Scrapbooking
- Industrial product assembly
- Mounting



Start by opening the dispenser on a flat surface.



Place ATG tape in hub until hook (A) locks in place.



Press trigger (B) while threading ATG tape as shown.



Loop liner through retainer and rotate clockwise to tighten.



Close cover. Pull trigger to apply ATG to surface.



Scan for more info or visit itape.com/doublecoated

