

i contain with


ipg

NovaThene
AquaMaster

NOVAGRIP™

LOSE YOUR SKIN BEFORE YOU LOSE YOUR GRIP!

NovaGrip 30 from IPG is a medium weight 30 mil geomembrane which has an aggressive raised pyramid imposed pattern on one side of the membrane. The embossed pattern can be used to provide a slip resistant surface. This product has already been incorporated into oil field rig liners to add extra non-slip grip for safety. NovaGrip 30 is an effective safeguard against falls on location and accidents. As always, our Geomembranes are resistant to a range of chemicals and hydrocarbons, and help our customers keep the environment safe from contaminants.

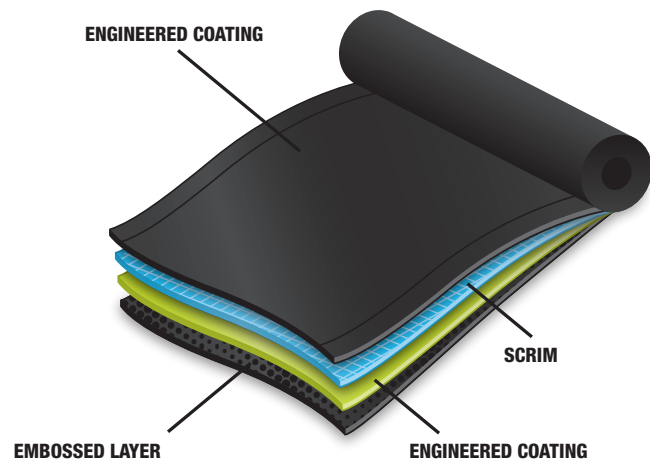

NOVAGRIP™

TECHNICAL DATA COMPARISON

Material	Thickness <i>mils</i>	Asperity Height (ASTM D7466)	Weight <i>oz/yd²</i>	Tensile Strength (ASTM D7003)		Tongue Tear (ATM D5884)		Grab Tensile (ATM D7004)		Puncture Resistance (ASTM D4833)
				<i>lbs/in</i>		<i>lbs/in</i>		<i>lbs/in</i>		
				<i>MD</i>	<i>CD</i>	<i>MD</i>	<i>CD</i>	<i>MD</i>	<i>CD</i>	
IPG	27	>20	14.5	250	200	65	90	320	280	118
Raven J25DT1	25	>20	16.6	50	62	42	50	130	130	50
Raven J30DT1	30	>20	18.4	56	68	46	54	145	145	55
InLine HercuScrim	27	>20	n/a	88	80	75	75	180	180	55

More information is available on the technical data sheet.

i contain with



800-565-2000

www.itape.com | E-mail: info@itape.com

©2015 Intertape Polymer Group® • NOVAGRIP SS • 020515-2334

